


DWG-02 PLATE OPEN 180° (BOTH PAIRS FOLDED BACK) — SCALE 1:28

Both leaf pairs fold 180° parallel to column face. Each folded pair projects 254mm from column face. Clear passage ~6380mm. Folded depth: 8(plate)+20(weld)+120(arm)+50(leaf1 stile)+6(gap)+50(leaf2 stile)=254mm from column face.

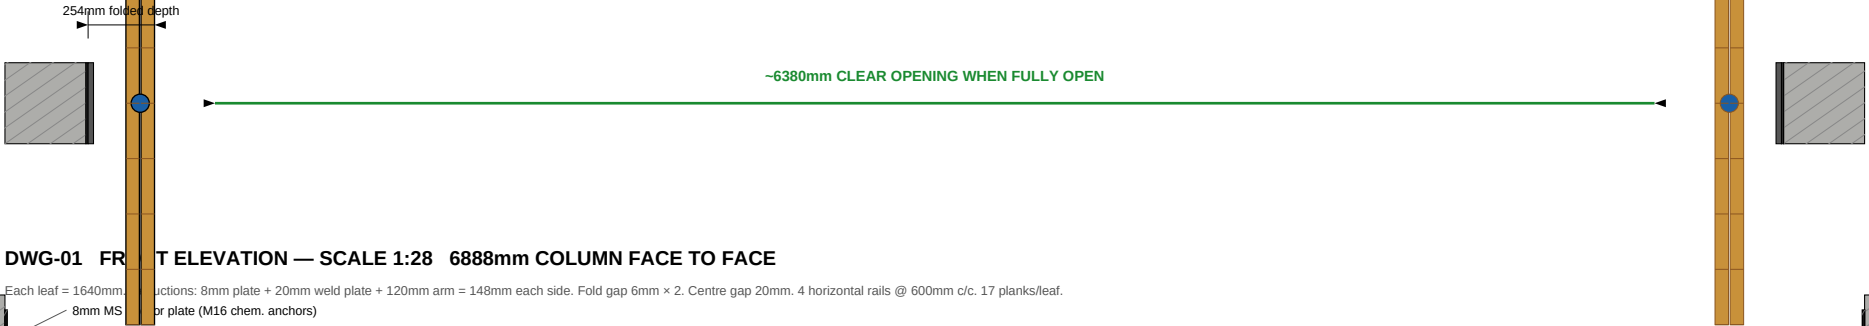

DWG-01 FRONT ELEVATION — SCALE 1:28 6888mm COLUMN FACE TO FACE



Each leaf = 1640mm. Fabrications: 8mm plate + 20mm weld plate + 120mm arm = 148mm each side. Fold gap 6mm x 2. Centre gap 20mm. 4 horizontal rails @ 600mm c/c. 17 planks/leaf.

8mm MS anchor plate (M16 chem. anchors)

late 20mm

800

800

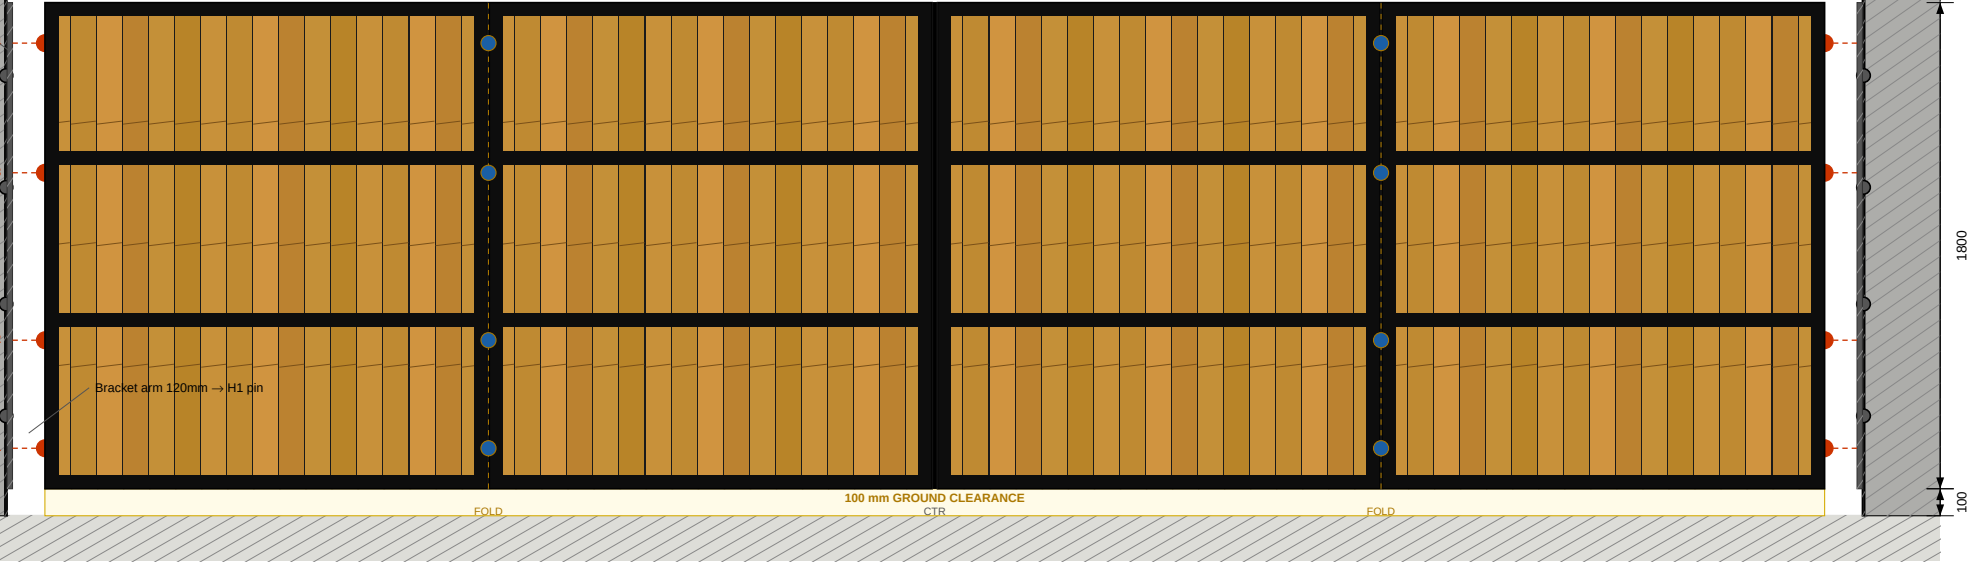


All dims in mm. Do not scale drawing. Verify on site. IS 4923 YST310. Weld: E7018/ER70S-6. Rev C: leaf 1640mm, hinge gap shown.

BIFOLDING GATE — COMPLETE FABRICATION DRAWING

Project:	Residential — Pimpri, Pune	Dwg:	GTE-HR-003 Rev C
Frame:	50×50×3 SHS IS4923 YST310	Hinge:	Cantilever 300kg, 8mm anchor plate
Leaf:	1640W×1800H, 17 planks 90×18	Scale:	NTS Sht 1/3


DWG-03 SINGLE LEAF — SCALE 1:10 1640W × 1800H mm

50×50×3 SHS: 4 horizontal rails + 2 stiles. 17 planks 90×18mm. Hinge arm 148mm from col face. 5mm clearance gap to anchor plate shown as shaded zone.

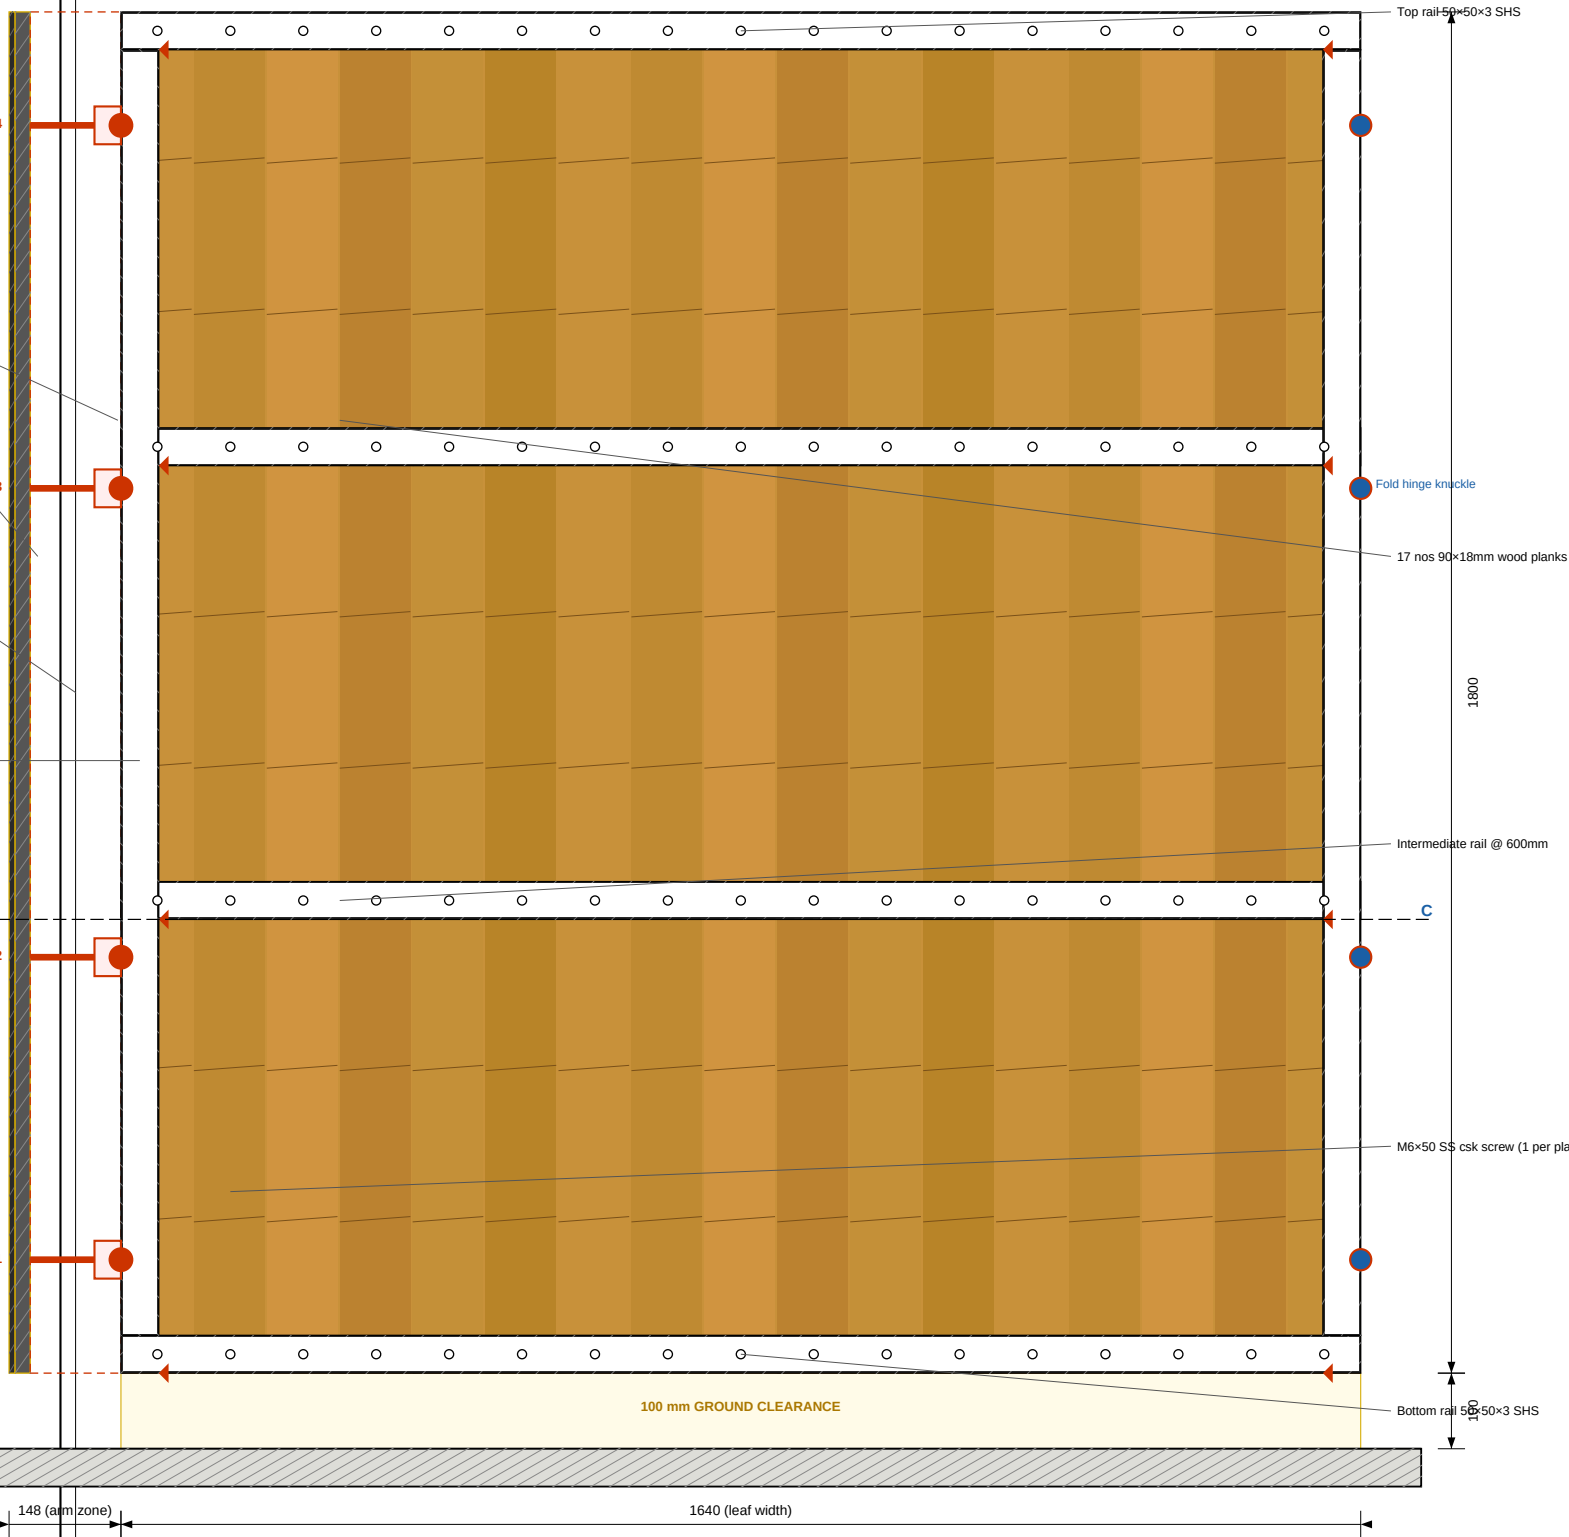

DWG-04 ANCHOR PLATE + CANTILEVER HINGE — SCALE 1:5

RCC column face. 8mm plate anchor bolted. Weld plate+bracket welded. Pin at 148mm from col.

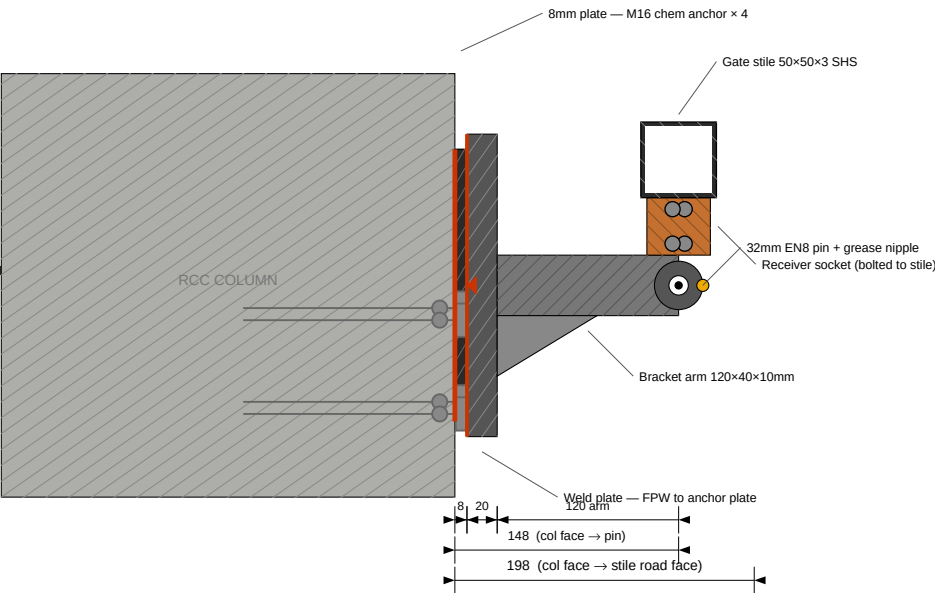


BIFOLDING GATE — COMPLETE FABRICATION DRAWING			
Project:	Residential — Pimpri, Pune	Dwg:	GTE-HR-003 Rev C
6888 COL-COL EACH LEAF 1640mm 4 HORIZ RAILS WOOD PLANKS ANCHOR PLATE HINGE			
Frame:	50×50×3 SHS IS4923 YST310	Hinge:	Cantilever 300kg, 8mm anchor plate
Leaf:	1640W×1800H, 17 planks 90×18	Scale:	NTS Sht 2/3

All dims in mm. Do not scale drawing. Verify on site. IS 4923 YST310. Weld: E7018/ER70S-6. Rev C: leaf 1640mm, hinge gap shown.


DWG-05 SECTION C-C — HORIZ. CUT AT RAIL 2 — SCALE 1:2

Shows RCC column, 8mm anchor plate, 20mm weld plate, 120mm bracket arm zone, gate stile, open span, 17 wood planks road face.

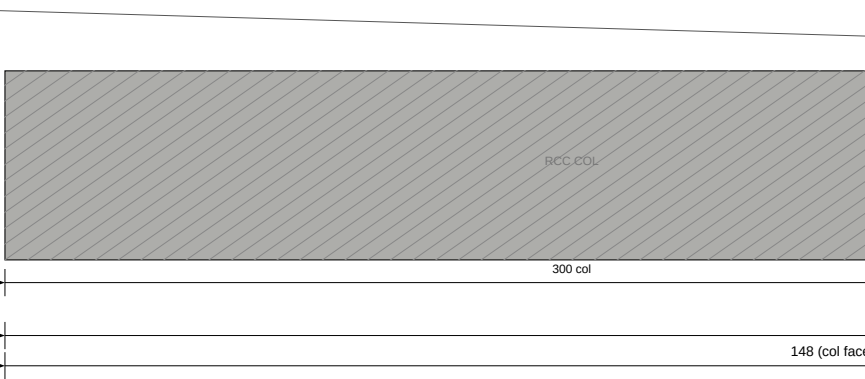

DWG-06 PLANK-TO-RAIL FIX — VERTICAL SECTION — SCALE 1:2

Rail cross-section, plank on road face, M6×50 countersunk screw, ~0.6mm gap between planks.

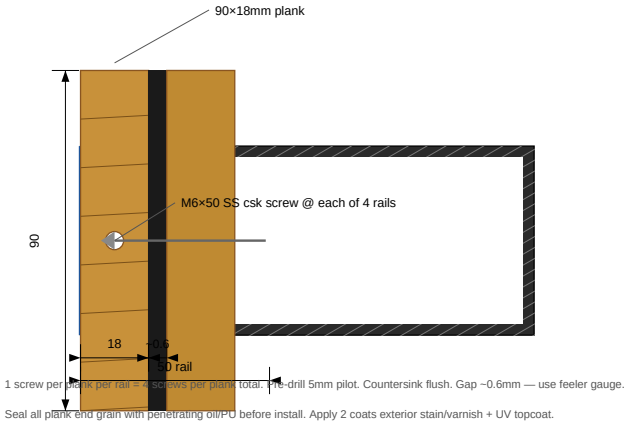

MEMBER SCHEDULE — GATE 6888 C-C | EACH LEAF 1640W×1800H | REV C

#	MEMBER	SECTION	L mm	QTY	TOT m	kg/m	TOT kg	NOTES
1	Top rail (×4 leaves)	50×50×3 SHS	1640	4	6.56	4.00	26.2	Full leaf width
2	Bottom rail (×4 leaves)	50×50×3 SHS	1640	4	6.56	4.00	26.2	100mm above paving
3	Mid rail 1 (×4 leaves)	50×50×3 SHS	1540	4	6.16	4.00	24.6	1640-2×50mm
4	Mid rail 2 (×4 leaves)	50×50×3 SHS	1540	4	6.16	4.00	24.6	At 600 & 1200mm
5	Left stile (×4 leaves)	50×50×3 SHS	1700	4	6.80	4.00	27.2	1800-2×50mm — carries hinges
6	Right stile (×4 leaves)	50×50×3 SHS	1700	4	6.80	4.00	27.2	1800-2×50mm — carries fold hinge
—	FRAME SUBTOTAL	50×50×3 SHS	—	—	39.0	4.00	155.9	+ 5% wastage = ~164kg
7	8mm anchor plate	300×1900×8 MS	1900	2	—	—	72.0	Full height, 1 per column
8	M16 chem. anchor	Hilti HIT-RE 500	150 embed	8	—	—	-2	4 per plate × 2 plates
9	Cantilever hinge assy	300kg, 32mm EN8	—	8	—	—	-32	4 per plate pair (H1-H4)
10	Bifolding (fold) hinge	50×200×6mm, 16mm	—	8	—	—	-12	2 per fold point × 2 pairs
11	Shoot bolt latch	600mm top+bottom	—	4	—	—	-1	Centre-meet leaves (L2+L3)
12	Wood planks	90×18×1800mm	1800	68	122.4	~8.1	-993	17/leaf × 4 leaves
13	M6×50 SS csk screw	A4 stainless	—	272	—	—	-1	1/plank/rail × 4 rails × 68 planks
14	End-grain sealer	Penetrating PU oil	—	3 L	—	—	—	Plank ends before install
TOTAL	GATE COMPLETE	All items	—	—	—	—	-1268	Excl. painting, transport, footing

GEOMETRY CHECK: 8(pl)+20(wp)+120(arm)+1640+6(fg)+1640+20(cg)+1640+6(fg)+1640+120(arm)+20(wp)+8(pl) = 6888mm ✓

NOTES: (1) 50×50×3 SHS: wall 3mm mandatory — do not substitute 2mm. (2) Teak/sal preferred — pine acceptable if kiln-dried, H3-treated.

(3) Anchor plate: M20 RCC column min. 300×300mm. SE to verify column for overturning. (4) Leaf weight ~67kg — 300kg hinge gives 4.5× SF. ✓

(5) Planks: 17 nos × 90mm = 1530mm on 1540mm clear. Gap = 0.6mm — planks essentially butted. Apply UV varnish before install.

BIFOLDING GATE — COMPLETE FABRICATION DRAWING

Project:	Residential — Pimpri, Pune	Dwg:	GTE-HR-003 Rev C
6888 COL-COL EACH LEAF 1640mm 4 HORIZ RAILS WOOD PLANKS ANCHOR PLATE HINGE			
Frame:	50×50×3 SHS IS4923 YST310	Hinge:	Cantilever 300kg, 8mm anchor plate
Leaf:	1640W×1800H, 17 planks 90×18	Scale:	NTS Sht 3/3